

# **BLUETTI AC180P**

Mobile Power with Ease & Peace

Data Sheet SPECIFICATIONS

# **AC180P PORTABLE POWER STATION**

BLUETTI AC180P is a portable power station with pure sine wave inverter and LiFePO4 battery. As for recharging, AC180P takes up to 1,440W AC input and 500W DC input. The fast charging feature ensures your machine remains on standby at all times.



5 Years Warranty



Smart APP Control



1,440W Fast Charging



1,440Wh Long Battery Life



1,800W High Output Power



Free & Green Outdoor Charging

With a power output of 1,800W, the AC180P can not only cater to nearly all electrical appliances in the room, but also play an important role during outdoor travel. Its lightweight body and the option to choose up to 500W of solar charging make you power independent and bring more possibilities to your outdoor adventures.

#### **APPLICATIONS**



Camping



Barbecue



**RV** Trip




**Outdoor Streaming** 

Data Sheet SPECIFICATIONS

## WHY BLUETTI AC180P?

## **Highly Efficient Charging**

0-80% Recharging in 1 Hour with 1,440W AC Input.

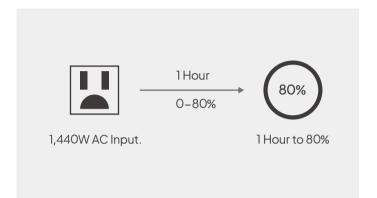


### Power 99% Appliances

Power Lifting Mode, boost the AC output from 1,800W to 2,700W to satisfy most power needs.




#### Seamless 24/7 UPS

The UPS function enables your emergency power response to switch over in just 20ms in case of a power outage.

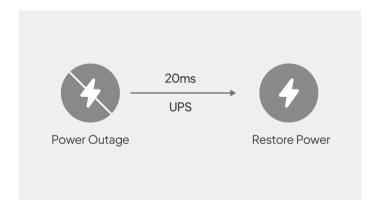

#### **Multiple Charging Ways**

Flexible to charge the AC180P via AC outlets, solar panels, car or generator.

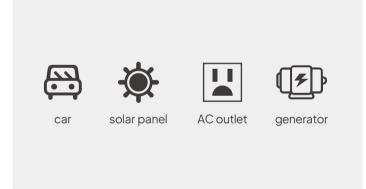

#### Safe & Reliable

Safety always comes first priority.



Data Sheet SPECIFICATIONS

# **OVERVIEW**



SPECIFICATION	
Battery Chemistry	LiFePO4
Weight	17kg
Output	1,800W
Capacity	1,440Wh
Charging Temperature Discharging Temperature	0°C ~ 40°C -20°C ~ 40°C

INPUT	
AC	1,440W Max. @10 °C ~ 30 °C
UPS	Switching time ≤20ms
DC	500W Max, 12V-60V, 10A
Lead-acid battery charging	12V/24V
Car Charging	12V/24V

OUTPUT		
AC	1,800W In total	
Output Port*4 (US)	50/60Hz 120V, 15A	
Output Port*4 (JP)	50/60Hz100V,18A	
Output Port*2 (EU)	50/60Hz 230V, 7.8A	
DC		
Cigarette Lighter Port*1	120W Max, 12V/10A	
USB-A*4	5V/3A	
USB-C*1	5V/9V/12V/15V/2OV, 3A; 2OV, 5A	
Wireless Charging Port	5W/7.5W/10W/15W	

<sup>\*</sup>Specififications are subject to change without notice



BLUETTI

Contact Us